

Fluxes for non ferrous alloys.
Release agents for die-casting.

Coatings for gravity & low pressure molds

Extrusion lubricants.

Fluxes for copper alloys.


A. CESANA S.p.A.
Via F. Turati, 23
20016 Pero (Milano) - ITALY

Phone +39 - 02.35.34.941
Fax +39 - 02.33.90.714
E-mail info@acesana.com
Web site www.acesana.com



Company with Quality System certified by DNV – EN ISO 9001:2000

EXTRUSION LUBRICANTS

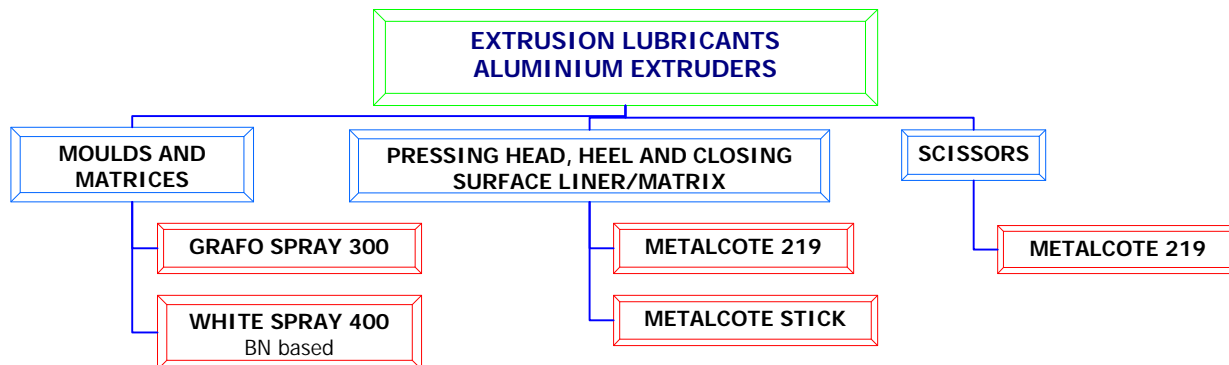

Family	Product	Description	Shape	Dosing rate	Package
LUBRICANTS FOR MOULDS AND MATRICES	GRAFO SPRAY 300	Release and lubricant agent in spray tins for extrusion matrices and aluminium foundry moulds, gravity dies, pretreatment of moulds for glass, pressure die-casting moulds, expellers, extractors, plugs, friction and wear zones. Contains micronized special graphite, indicated up to 1200°C, resistant against friction and oxidation. It forms a protective film, avoiding blocking, friction and soldering problems.	Spray	Spray as supplied on clean, dry surfaces at temperature <200°C	Spray bottles 400 ml in cardboard boxes of 12 pieces
	WHITE SPRAY 400	Release and lubricant agent in spray tins for pretreatment and lubrication of mechanisms and plugs working at high temperature, bolts and plugs, toggles, dies for gravity casting of magnesium or aluminium, dies for glass and glass curvature, friction and wear zones. Resistant against friction and oxidation. It does not dirty because it does not contain graphite.	Spray	Spray as supplied on clean, dry surfaces at temperature <200°C	Spray bottles 520 ml in cardboard boxes of 12 pieces
LUBRICANTS FOR PRESSING HEAD, HEEL AND CLOSING SURFACE LINER/MATRIX, SCISSORS	METALCOTE 219	Graphite based grease for lubrication of matrices, heel and scissors in aluminium extrusion and, besides, for lubrication of extractors, carriages and plugs of pressure die-casting moulds. Offers high lubrication grade and very good resistance against wear and high temperatures.	Paste	With swab or brush as supplied	Metallic big pails 20 kg
	METALCOTE STICK	Lubricant in sticks, graphite pigments based, for applications on matrices and moulds, heel, scissors, pressing head in aluminium extrusion and, besides, on pressure die-casting moulds and zones where it's necessary an intervention with lubricants in stick. It offers high lubricating power, resistance against wear and high temperatures, anti-soldering effect.	Stick	With pliers or pole as supplied	Boxes 20 or 80 pieces
	METALCOTE STICK 2000	Lubricant in sticks, pigments based, for applications on matrices and moulds, heel, scissors, pressing head in aluminium extrusion and, besides, on pressure die-casting moulds and zones where it's necessary an intervention with lubricants in stick. It offers high lubricating power, resistance against wear and high temperatures, anti-soldering effect. It does not dirty because it does not contain graphite.	Stick	With pliers or pole as supplied	Boxes 80 pieces